

DS-D5021FC

21" LCD Monitor


HIKVISION



Key Features

- Support 8bit/10bit 2-ch LVDS(1920×1080) HD display;
- Support 170° H wide viewing angle;
- Adopt 3-D digital comb filter;
- True color OSD and user-friendly operation menu;
- Support 16:9 or 4:3 aspect ratio selectable in OSD menu;
- Built-in speaker and audio amplifier
- 1 channel HDMI 1.3 input interface, support HDCP 1.2;
- Adopt 3D noise reduction technology;
- Support high definition JPEG decoding;
- Programmable 12-bit RGB gamma correction technology;
- Support software spread-spectrum technology to reduce EMI radiation;
- Adopt Mstar ACE-5 auto color and image enhancement engine, improve image contrast, detail and edge;
- Professional for Video Surveillance application: display HDMI digital plus VGA, S-video and BNC inputs(with Looping BNC output);
- Support CE, FCC and UL certificates;

Interface

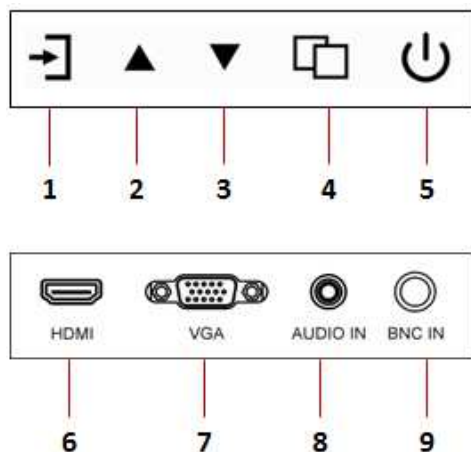

NO.	Description
1	Source button, show all signal input channel
2	Upward button, move cursor up
3	Downward button, move cursor down
4	Menu button, also as an confirm button when set parameters in the menu
5	Power on/off button
6	HDMI input interface
7	VGA input interface
8	Audio input interface
9	BNC input interface

Specifications

Model	DS-D5021FC
Display Type	TFT-LED Backlight
Screen Size	21"
Dot Pitch	0.2385(H) x0.2385(V)mm

Max Resolution	1920x1080	
Input Resolution	1920x1080;1680x1050;1600x900;1400x900;1360x768;1280x1024;1024x768;800x600;640x480; 720x400	
Brightness	200cd/m ²	
Contrast	600:1	
Response Time	3.5ms	
Color	8 bits,16.7 Million colors	
Viewable Area	457.9(H)x257.58(V)mm	
Viewing Angle	Horizontal 170°, Vertical 160°	
Interfaces	HDMI Input	1
	VGA Input	1
	BNC Input	1
	Audio Input	1 , 3.5 mm mini-jack
Power Supply	100 ~ 240V AC	
Consumption	< 30W	
Operation Temperature	32° ~ 104°(0℃ ~ 40℃)	
Operation Humidity	10 ~ 85%	
Storage Temperature:	-4° ~ 140°(-20℃ ~ 60℃)	
Bezel Material	Plastic	
Bezel Color	Black	
Device Dimensions	491.55x301.12x53.54mm(Without bracket)	
Certification	CE,FCC and UL	

Dimension

