

## DH-HCVR5104/5108/5116HS-S3

---

### 4/8/16CH Tribrid 720P-Pro Compact 1U HDCVI DVR



### Features

- > Support HDCVI/Analog/IP Video input
- > H.264+/H.264 dual-stream video compression
- > HCVR5104/5108/5116HS-S3: All channel 1080N/720P realtime or 1080P non-realtime recording
- > HDMI/VGA simultaneous video output
- > 4/8/16 channel synchronous realtime playback, GRID interface & smart search
- > Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videosec, Vivotek and etc.
- > ONVIF Version 2.4.1 conformance
- > Support 1 SATA HDD up to 6TB, 2 USB2.0(16CH 1 USB3.0)
- > 3D intelligent positioning with Dahua PTZ dome camera
- > Multiple network monitoring: Web viewer, CMS(DSS/Smart PSS)&Smart Phone(DMSS)
- > Advanced intelligent functions: Tripwire, Intrusion, Abandoned/Missing, Face Detection

# DH-HCVR5104/5108/5116HS-S3


## Technical Specifications

Model		DH-HCVR5104HS-S3	DH-HCVR5108HS-S3	DH-HCVR5116HS-S3
<b>System</b>				
Main Processor		Embedded processor		
Operating System		Embedded LINUX		
<b>Video</b>				
Input		4 channel, BNC	8 channel, BNC	16 channel, BNC
Standard	Analog	NTSC/PAL		
	HDCVI	1080P/720P HDCVI Camera		
	IP	4+2 up to 5Mp	8+4 up to 5Mp	16+8 up to 5Mp
<b>Audio</b>				
Input		1 channel, RCA		
Output		1 channel, RCA		
Two-way Talk		Reuse audio input/output channel 1		
<b>Display</b>				
Interface		1 HDMI, 1 VGA		
Resolution		1920×1080, 1280×1024, 1280×720, 1024×768		
Display Split		1/4/6	1/4/8/9	1/4/8/9/16
Privacy Masking		4 rectangular zones (each camera)		
OSD		Camera title, Time, Video loss, Camera lock, Motion detection, Recording		
<b>Recording</b>				
Video/Audio Compression		H.264/G.711		
Resolution		1080P(1920×1080)/1080N(960×1080)/720P(1280×720)/960H(960×576/960×480)/D1(704×576/704×480)/HD1(352×576/352×480) /BCIF(704×288/704×240) CIF(352×288/352×240) / QCIF(176×144/176×120)		
Record Rate	Main Stream:	1080P(1~15fps) 1080N/720P/960H/D1/HD1/BCIF/CIF/QCIF (1~25/30fps)		
	Extra Stream	D1/CIF/QCIF(1~15fps)		
Bit Rate		1~6144Kb/s		
Record Mode		Manual, Schedule(Regular(Continuous), MD), Stop		
Record Interval		1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec		
<b>Video Detection &amp; Alarm</b>				
Trigger Events		Recording, PTZ, Tour, Alarm out, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips		
Video Detection		Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank		
<b>Intelligent Video (Optional)</b>		Tripwire, Intrusion, Abandoned/Missing, Face Detection		
<b>Playback &amp; Backup</b>				
Sync Playback		1/4	1/4/9	1/4/9/16
Search Mode		Time/Date, MD & Exact search (accurate to second)		
Playback Functions		Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next		

## DH-HCVR5104/5108/5116HS-S3

	camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom	
Backup Mode	USB Device/Internal SATA burner/Network	
<b>Network</b>		
Ethernet	RJ-45 port (10/100M)	RJ-45 port (10/100M/1000M)
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P	
Max. User Access	128 users	
Smart Phone	iPhone, iPad, Android, Windows Phone	
<b>Storage</b>		
Internal HDD	1 SATA port, up to 6TB	
<b>Auxiliary Interface</b>		
USB Interface	2 ports(1 Rear), USB2.0	2 ports (1 Rear USB3.0, 1 Front USB2.0)
RS485	1 port, For PTZ Control	
<b>General</b>		
Power Supply	DC12V/2A	
Power Consumption	10W(without HDD)	
Working Environment	-10°C ~ +55°C / 10%~90%RH / 86~106kpa	
Dimension(W×D×H)	Compact 1U, 260mm×220mm×40mm	
Weight	0.75KG(without HDD)	

### System Connection

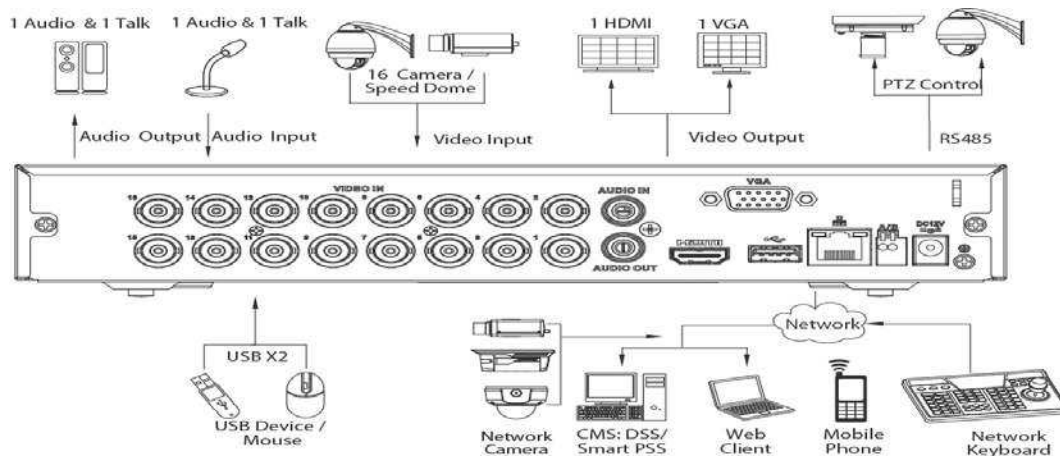

\*Takes HCVR5116HS-S3 as an example

### Dahua Technology Co., Ltd.

1199' BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

\*Design and specifications are subject to change without notice.

© 2015 Dahua Technology Co., Ltd.